



# Shine EVO




	W*	Adjustable CCT	Lm	Ref.
Shine EVO	24W	3000K   4000K	1450lm - 3450lm	U01.SE-ST.CCT.24W
Shine EVO SENSOR	24W	3000K   4000K	1450lm - 3450lm	U01.SE-MW.CCT.24W
Shine EVO SENSOR + NOOD*	24W	3000K   4000K	1450lm - 3450lm	U01.SE-FO.CCT.24W

- \* Nood 1h autotest 280lm/nood
- \* Adjustable Power 12W - 18W - 24W

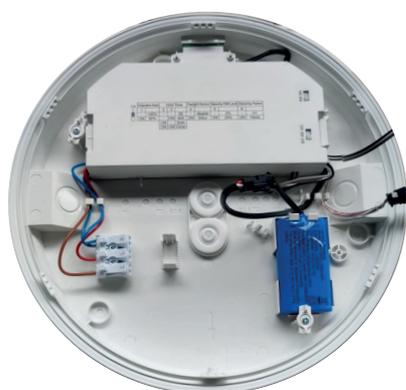


A: 300 mm  
B: 85mm  
C: 250mm

# Shine EVO

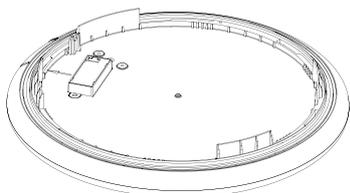

Detection Area	Hold Time		Daylight Sensor	Stand-by DIM Level	Stand-by Period
1	2	3	4	5	6
-	100%	-	-	5S	-
ON	50%	-	ON	60S	ON
		ON	-	3min	
		ON	ON	10min	
			-	disable	-
			ON	30lux	ON
				0%	-
				20%	ON
					∞
					15min

Ceiling Mounting pattern(Unit: m)

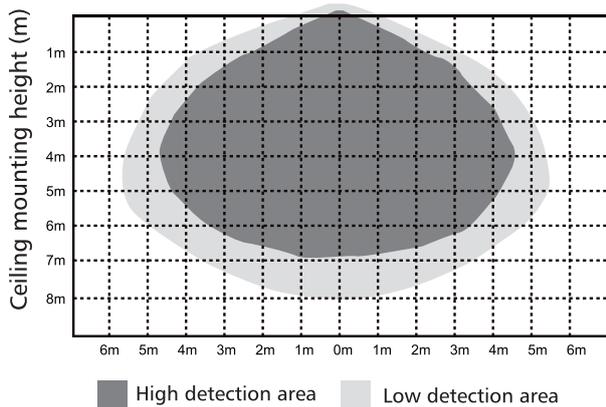

Wall Mounting pattern(Unit: m)

